



**nova line**

**NOVA Italia S.p.A.**

Via Vecchia Scorciosa 33-35 - 66022 Fossacesia (Ch)

Tel. 0872 578934 (15 linee r.a.) - Fax 0872 57670

www.novaline.it - info@novaline.it

P.I.: 01956430696 - C.C.I.A.A. CH140833 - Capitale Sociale: € 1.100.000,00 i.v.



RAEE: IT08020000003247



Azienda con sistema  
di gestione certificato  
**ISO 9001: 2015**  
Certificato N. IT 15/0141




NovaLine.it



novaline.it



novaline.it

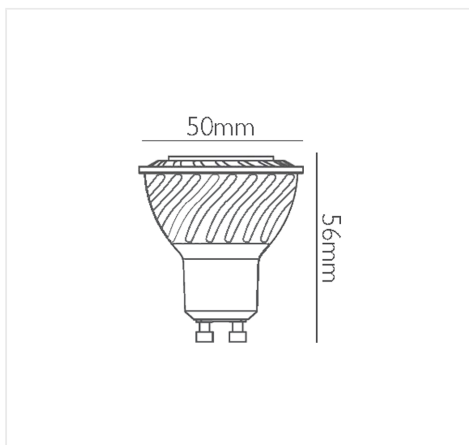

# LDC4510N

LED SPOT BULB 7 W, GU10, NATURAL WHITE 4000 K

## INFORMATION

Brand:NOVA LINE

Kind of Lamp:Led

Lamp Base:GU10

Dimensions:Ø 50x55 mm

Material:Coated aluminum + PC

Use:Indoor

## ELECTRICAL FEATURES

Nominal Voltage:185-265 V

Current:60 mA

Power Factor:>0,5

Power:7 W

Working Temperature:-20~50°C

Frequency:50/60 Hz

## LIGHTING FEATURES

Lumen:500

Led Model:COB

Led Brand:ETI

Energy Class:A+

Colour Temperature:4000 K

Colour Rendering:> 80

Beam Angle:38°

N°of on/off Switches:10000

Lifetime:20000

Dimmable:NO

Equivalence to halogen:45 W



TUVSGS



## LOGISTICS

EAN:8028274094060

Pcs/Box.:1

ITF Inner:18028274094067

Pcs/Inner:10

ITF Master:28028274094064

Pcs/Master:100

Gross weight Kg:0.0741

Packaging:Blister

Inner Height cm:10

Inner Width cm:27

Master Height cm:22



**nova**line

**NOVA Italia S.p.A.**

Via Vecchia Scorciosa 33-35 - 66022 Fossacesia (Ch)

Tel. 0872 578934 (15 linee r.a.) - Fax 0872 57670

www.novaline.it - info@novaline.it

P.I.: 01956430696 - C.C.I.A.A. CH140833 - Capitale Sociale: € 1.100.000,00 i.v.



RAEE: IT08020000003247



Azienda con sistema

di gestione certificato

ISO 9001: 2015

Certificato N. IT 15/0141



NovaLine.it



novaline.it



novaline.it

Master Width cm:60  
Inner Weight Kg:0.741  
Master Weight Kg:7.941  
Height cm:6.3  
Length cm:5.2  
Width cm:5.2

## LIGHT DISTRIBUTION CURVE

| Illuminance at a Distance |                 |            |        |
|---------------------------|-----------------|------------|--------|
|                           | Center Beam LUX | Beam Width |        |
| 1,00M                     | 1.290 LUX       | 0,59 M     | 0,59 M |
| 2,00M                     | 322 LUX         | 1,18 M     | 1,19 M |
| 3,00M                     | 143 LUX         | 1,77 M     | 1,78 M |
| 4,00M                     | 80,6 LUX        | 2,35 M     | 2,38 M |
| 5,00M                     | 51,6 LUX        | 2,94 M     | 2,97 M |
| 6,00M                     | 35,8 LUX        | 3,53 M     | 3,57 M |

■ Vert. Spread: 32,8°  
■ Horiz. Spread: 33,1°

## LIGHT INTENSITY CURVE

